


Proper Securement of Ballistic Skirts



Mounting Pins
(seal replaces locking pin)

1. Replace six spring locking pins on the end of the skirt mounting pins with approved anti-pilferage seals.
2. The approved anti-pilferage seals for purchase are identified as NSN 5340-01-260-9935 and cost roughly \$2.
3. Ensure vertical skirt hinge pins are present and secure.
4. Ensure the bolt on the swing latch on skirt one is tensioned properly.
5. See TMs 9-2350-264-20-1-1 or 9-2350-388-23-1-2 for more details.

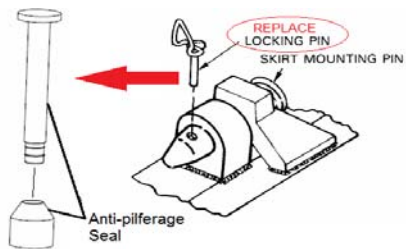